


3-INCH FLUSH COMMERCIAL

MIDLAND™
GARAGE DOOR MFG CO




3-INCH COMMERCIAL FLUSH

UNCOMPROMISING QUALITY & STRENGTH

At Midland, we're proud to make the strongest, longest-lasting commercial overhead doors in the industry, and our 3-Inch doors are the best of the best. Our ThermoGuard™ and EnergySaver™ doors are manufactured using a state-of-the-art production line to deliver exceptional R-values.

COLORS

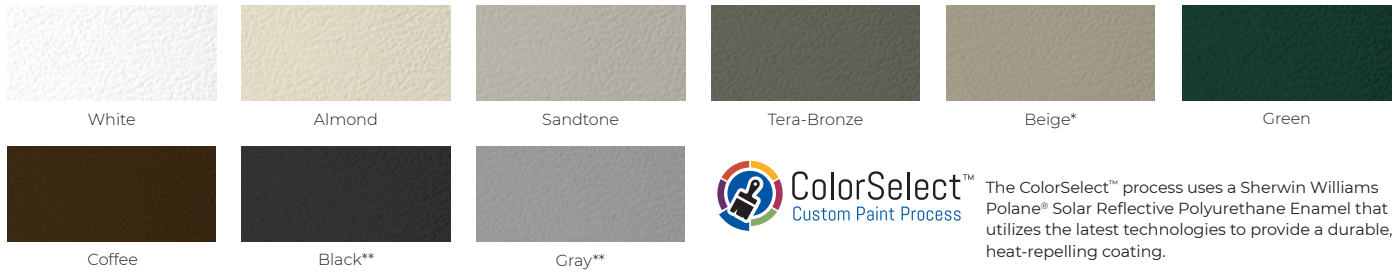

*Available in ThermoSteel™ only. **Available in ThermoGuard™ only. Due to the printing process, colors may vary.

INSULATION

	ThermoGuard™	EnergySaver™
Foam/Insulate	Polyurethane	Polystyrene
R-Value	26.0	17.1
U-Factor (Btu/hr/ft ² /F)	0.114	0.145
Thickness	3 inches	3 inches
Maximum Width	40 feet 2 inches	40 feet 2 inches
Exterior Steel	27 gauge <i>20 gauge upgrade, white only</i>	25 gauge <i>20 gauge upgrade, white only</i>
Interior Steel	27 gauge	25 gauge
Warranty* <i>Excludes Springs</i>	10 years	10 years

*For full warranty details contact your Midland dealer



WINDOWS



24" x 7"



24" x 12"




32" x 14"

GLASS




Choose from Plain, Obscure, Frosted, Gray Tinted, Bronze Tinted, LoE, and Double Dark

TRACK MOUNTING



Reverse Angle Mounted Track
Continuous leg-in angle to attach to steel jambs



Angle Mounted Track
Continuous leg-out angle used on larger doors to attach to wood jambs


TRACK CONFIGURATIONS



Standard Lift
For normal installations



Inclined Track
To follow pitch of roof



Hi-Lift
To put horizontal track as close to ceiling as possible



Vertical Lift
Full vertical rise where headroom is available



Low Headroom
For low-clearance installations

MIDLAND™
GARAGE DOOR MFG CO

PLACE YOUR ORDER TODAY

MIDLANDGARAGEDOOR.COM | 800.437.4056

YOUR LOCAL GARAGE DOOR DEALER